



END VIEW

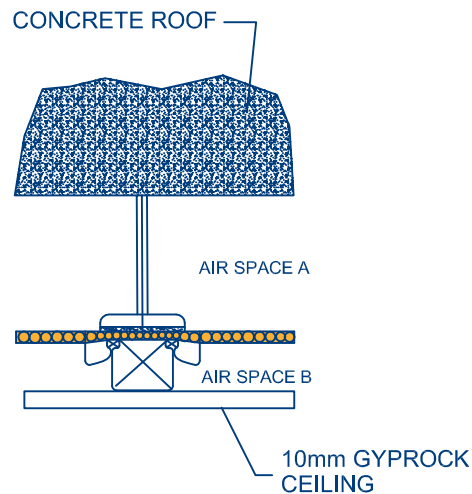

SIDE VIEW

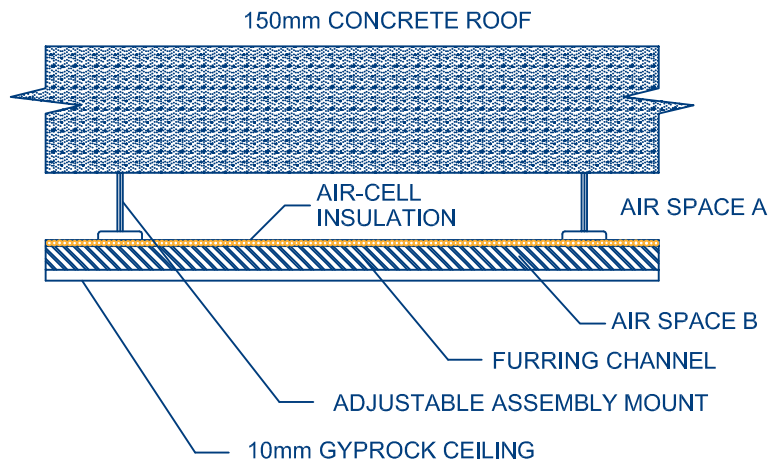

Notes:

The R-values shown are Total R-values for the building element as required by the Energy Provisions of the Building Code of Australia. Air-Cell products are manufactured, tested and packaged in conformance with AS/NZS 4859.1:2002 – Amdt 1.

The contribution of the product Total R-values depends on installation and environmental conditions. The R-value will be reduced in the event of the accumulation of dust on the upward facing surfaces and in those cavities that are ventilated.

Where joints are applicable, apply 150mm overlap (taped or untaped) or butt joint and tape.

Total R-Values

Air Spaces A	B	Product	Heat Flow In	Heat Flow Out
100mm-1200mm	28mm	Retrosshield®	R _T 3.2	R _T 1.6
100mm-1200mm	16mm	Retrosshield®	R _T 2.9	R _T 1.5